



600 X 600 mm  
Porcelain tiles

**FRENI'S**  
Ceramic

**3D MATT SERIES**



6003

600 X 600 mm  
Porcelain tiles






6004

600 X 600 mm  
Porcelain tiles



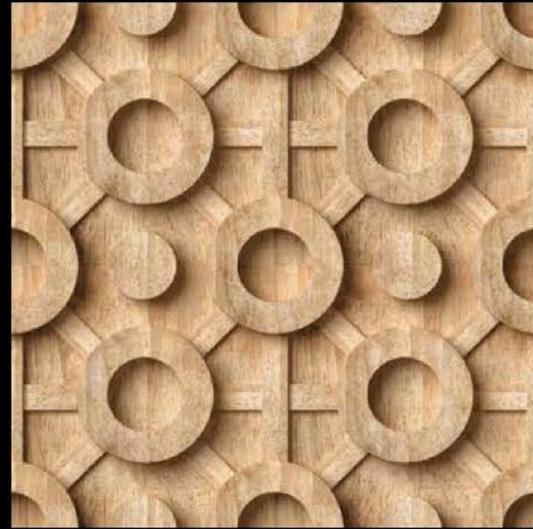

6005

600 X 600 mm  
Porcelain tiles






6008

600 X 600 mm  
Porcelain tiles



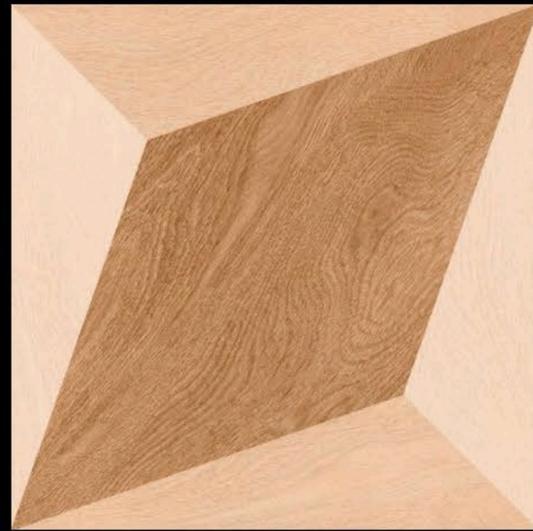

6011

600 X 600 mm  
Porcelain tiles





6014

600 X 600 mm  
Porcelain tiles





6015

600 X 600 mm  
Porcelain tiles






6016

600 X 600 mm  
Porcelain tiles




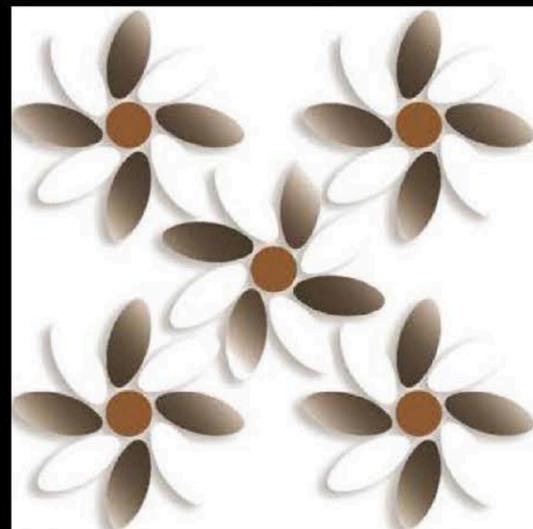

6017

600 X 600 mm  
Porcelain tiles




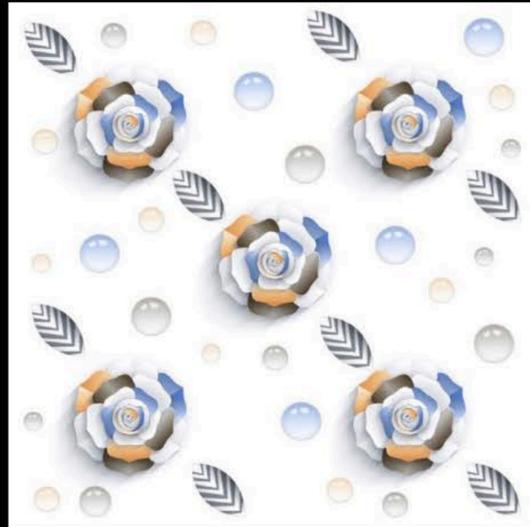

6018

600 X 600 mm  
Porcelain tiles




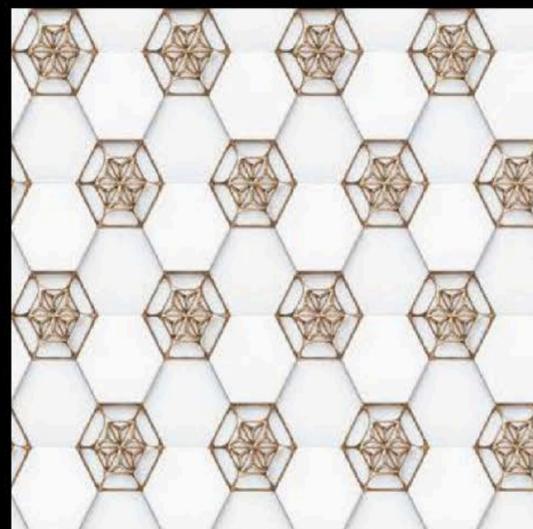

6021


600 X 600 mm  
Porcelain tiles




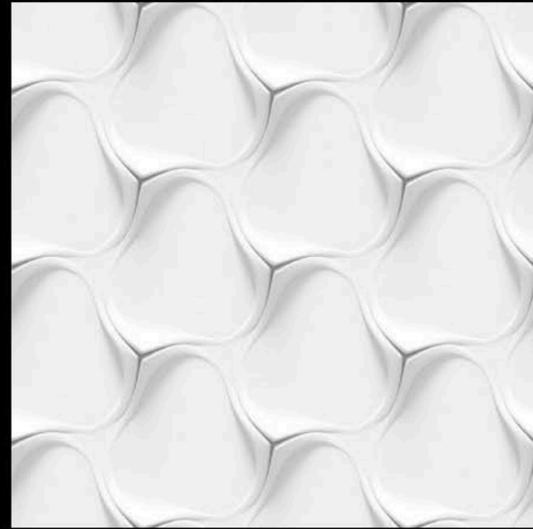

6022

600 X 600 mm  
Porcelain tiles

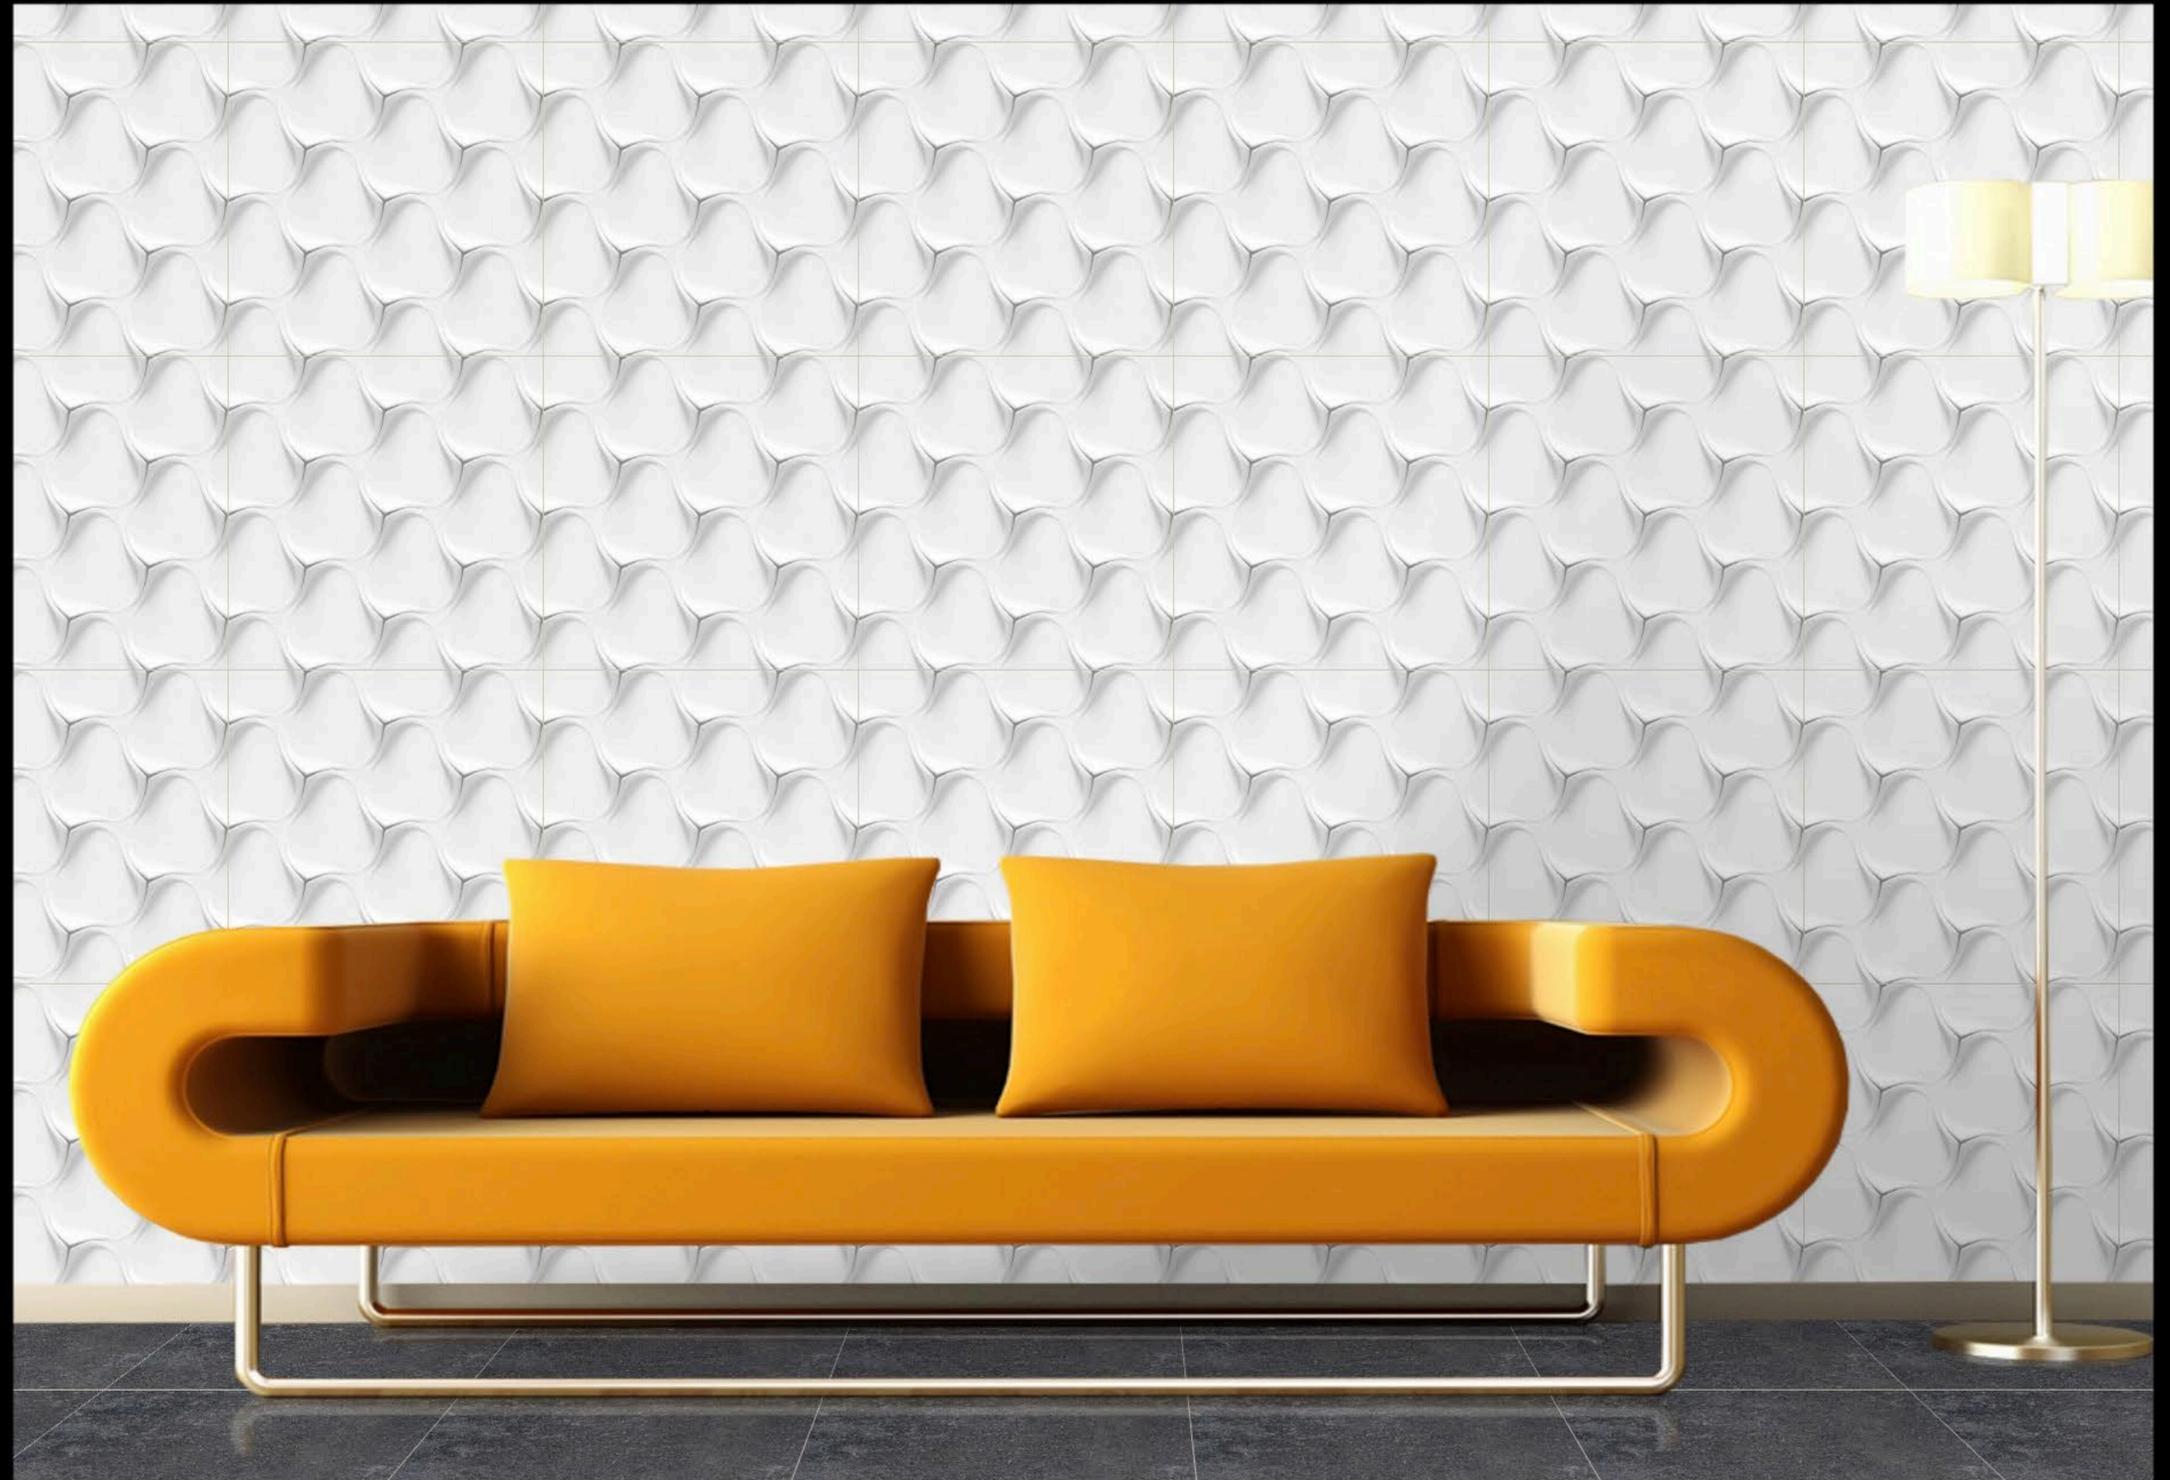

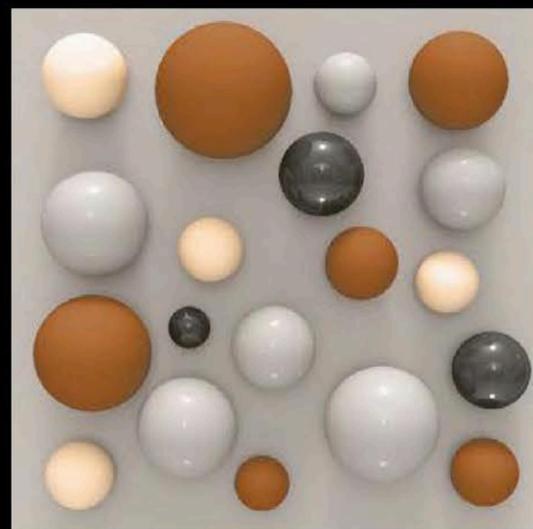

6026

600 X 600 mm  
Porcelain tiles






6027

600 X 600 mm  
Porcelain tiles



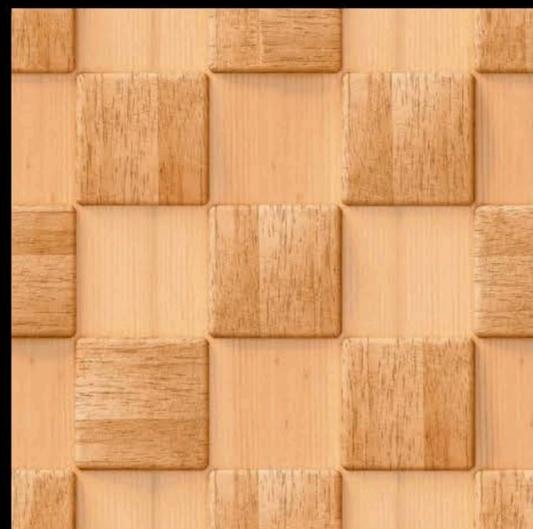

6028

600 X 600 mm  
Porcelain tiles






6029

600 X 600 mm  
Porcelain tiles



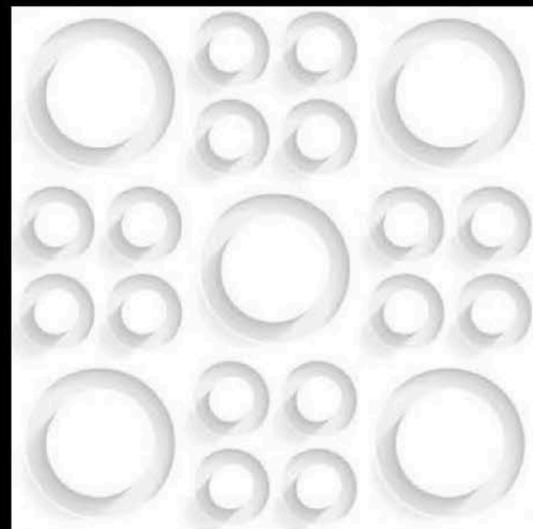

6030

600 X 600 mm  
Porcelain tiles






6031

600 X 600 mm  
Porcelain tiles



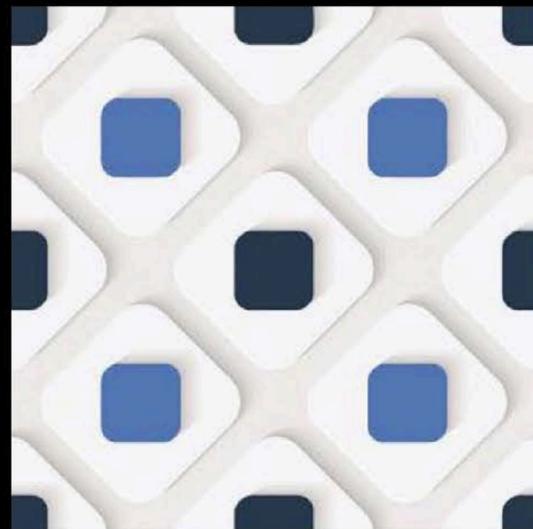

6034


600 X 600 mm  
Porcelain tiles





6035

600 X 600 mm  
Porcelain tiles

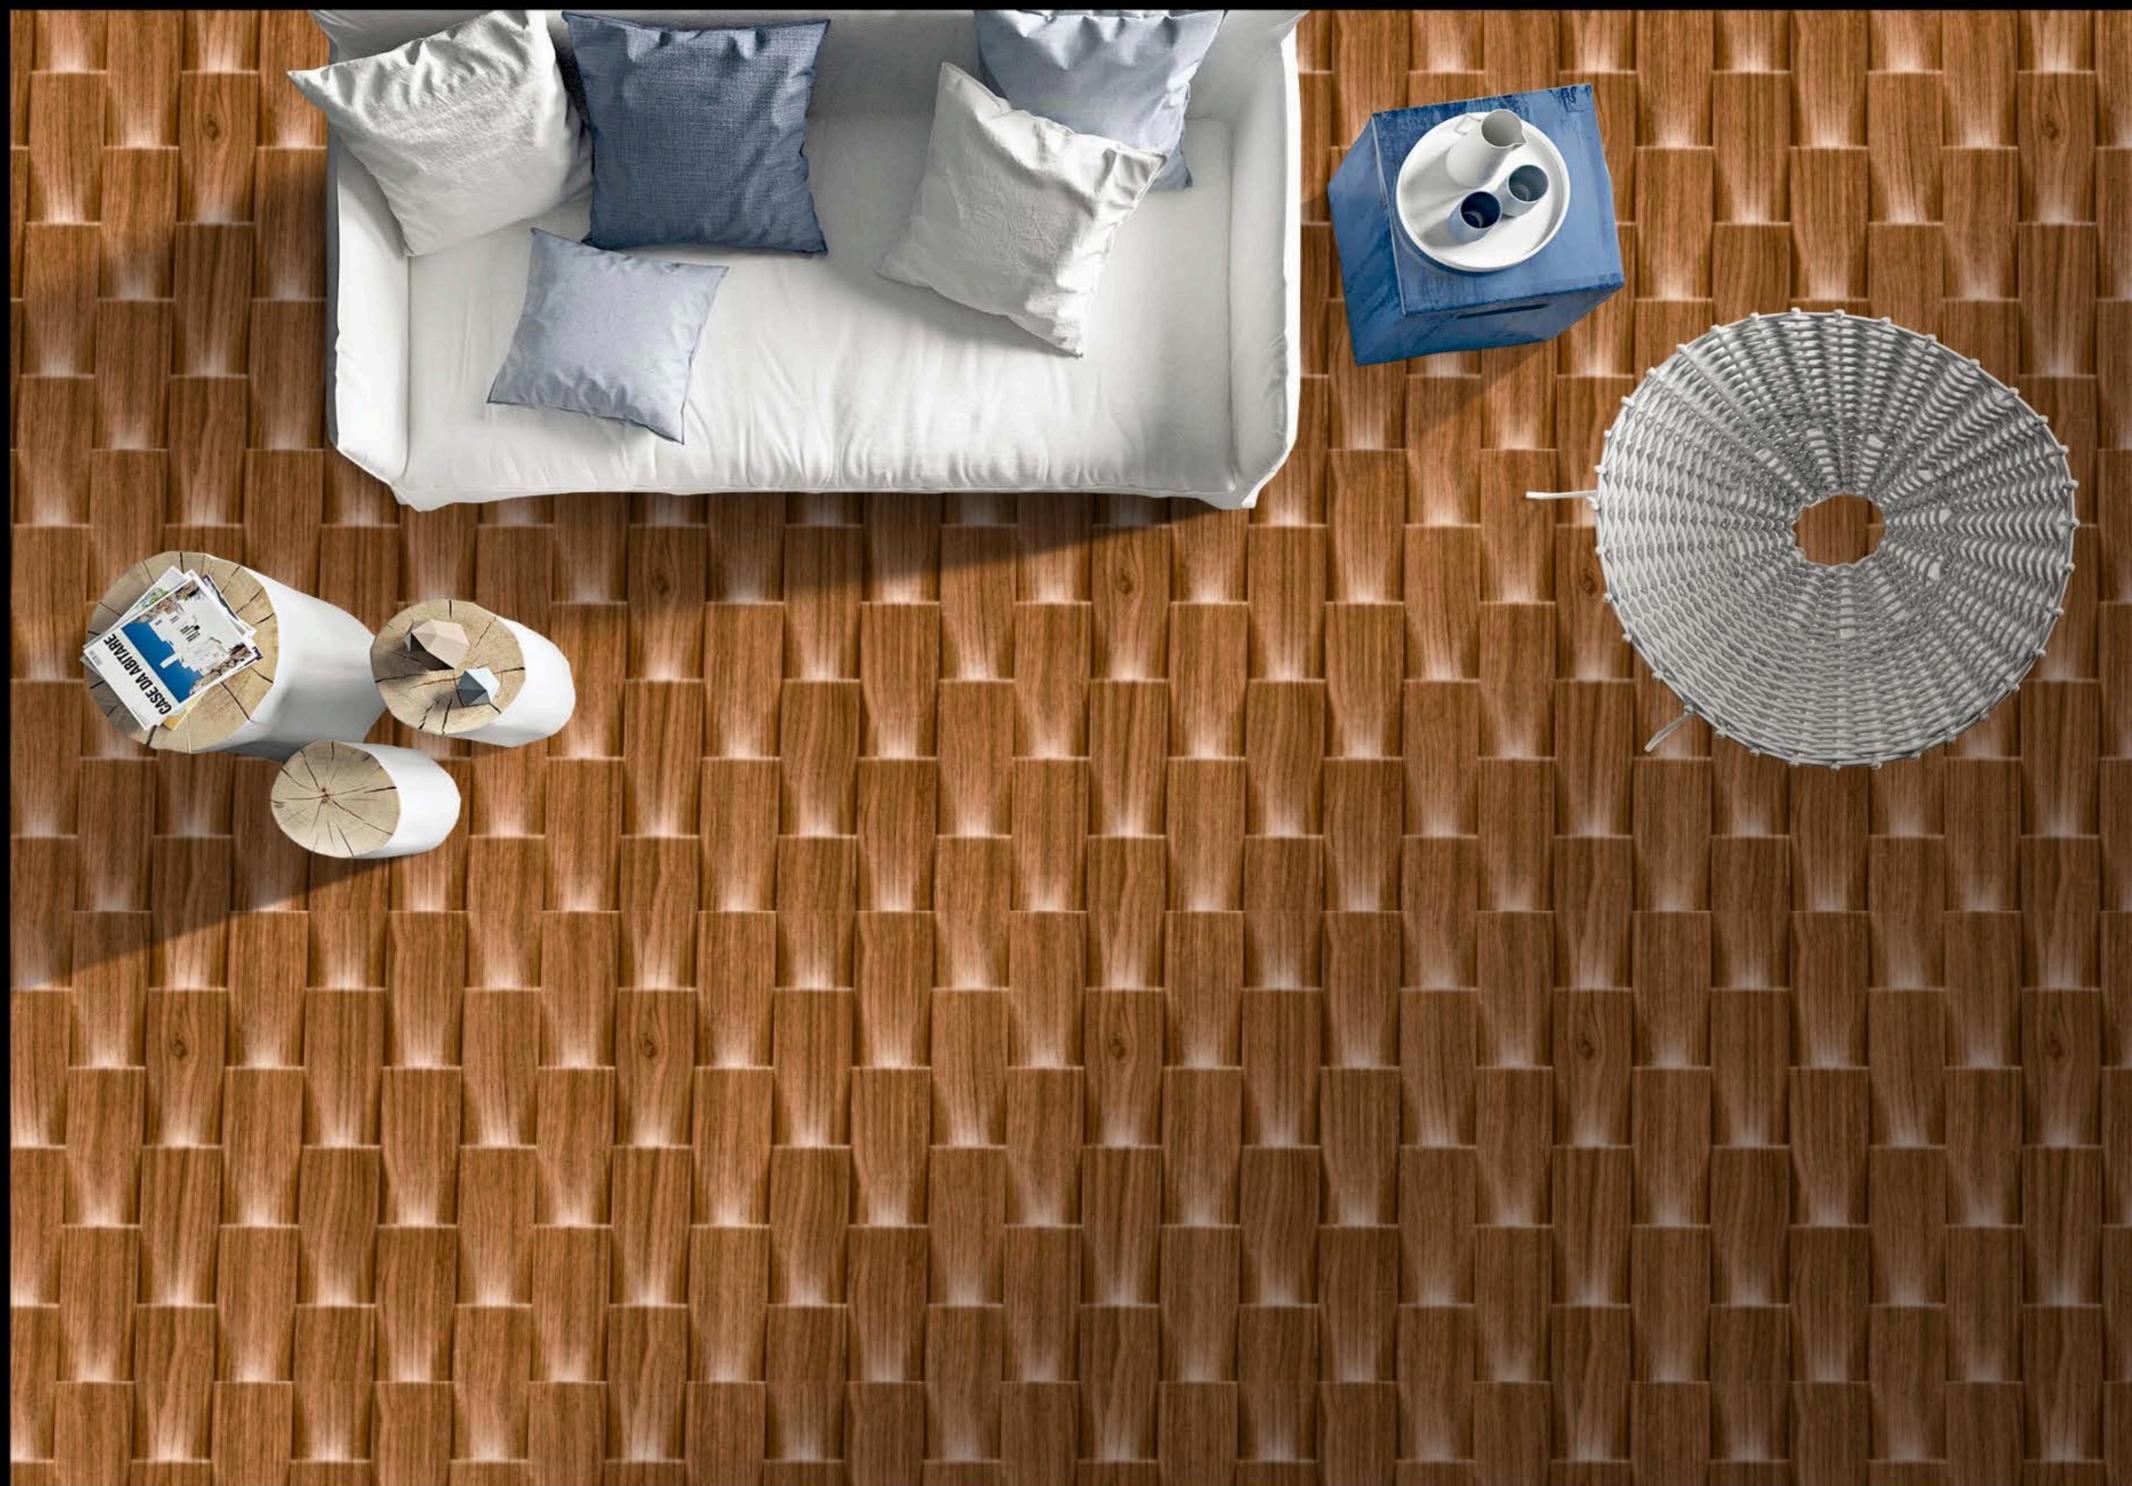




6036




600 X 600 mm  
Porcelain tiles

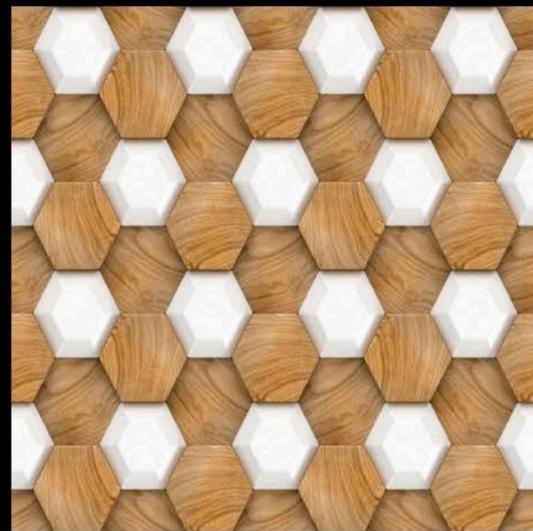

6037

600 X 600 mm  
Porcelain tiles




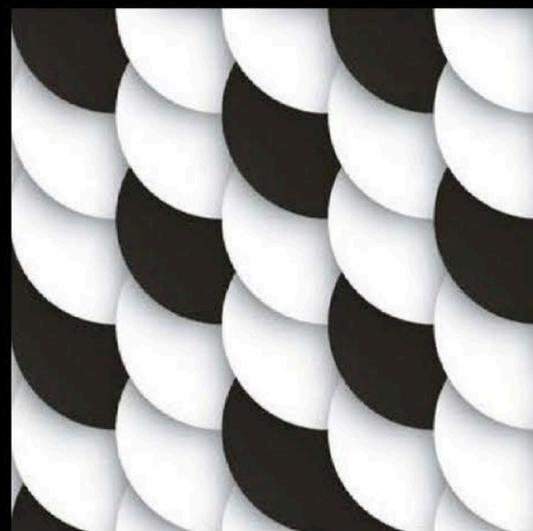

6041

600 X 600 mm  
Porcelain tiles




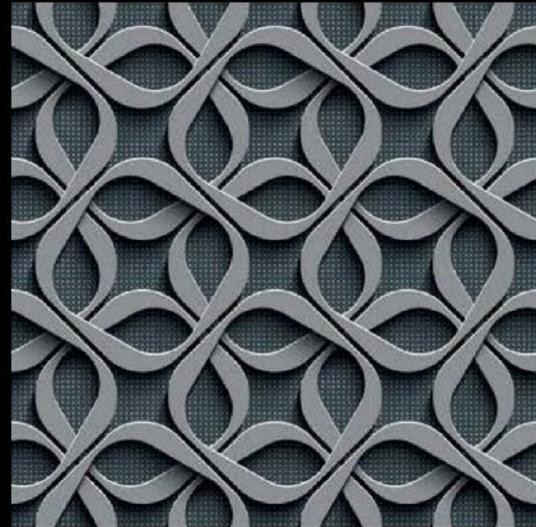

6042


600 X 600 mm  
Porcelain tiles




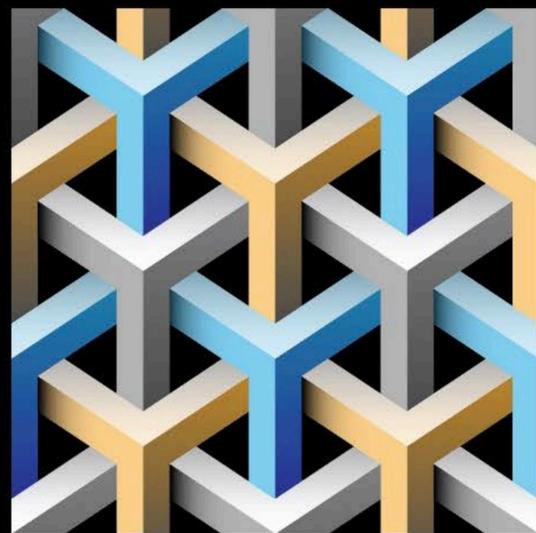

6044


600 X 600 mm  
Porcelain tiles

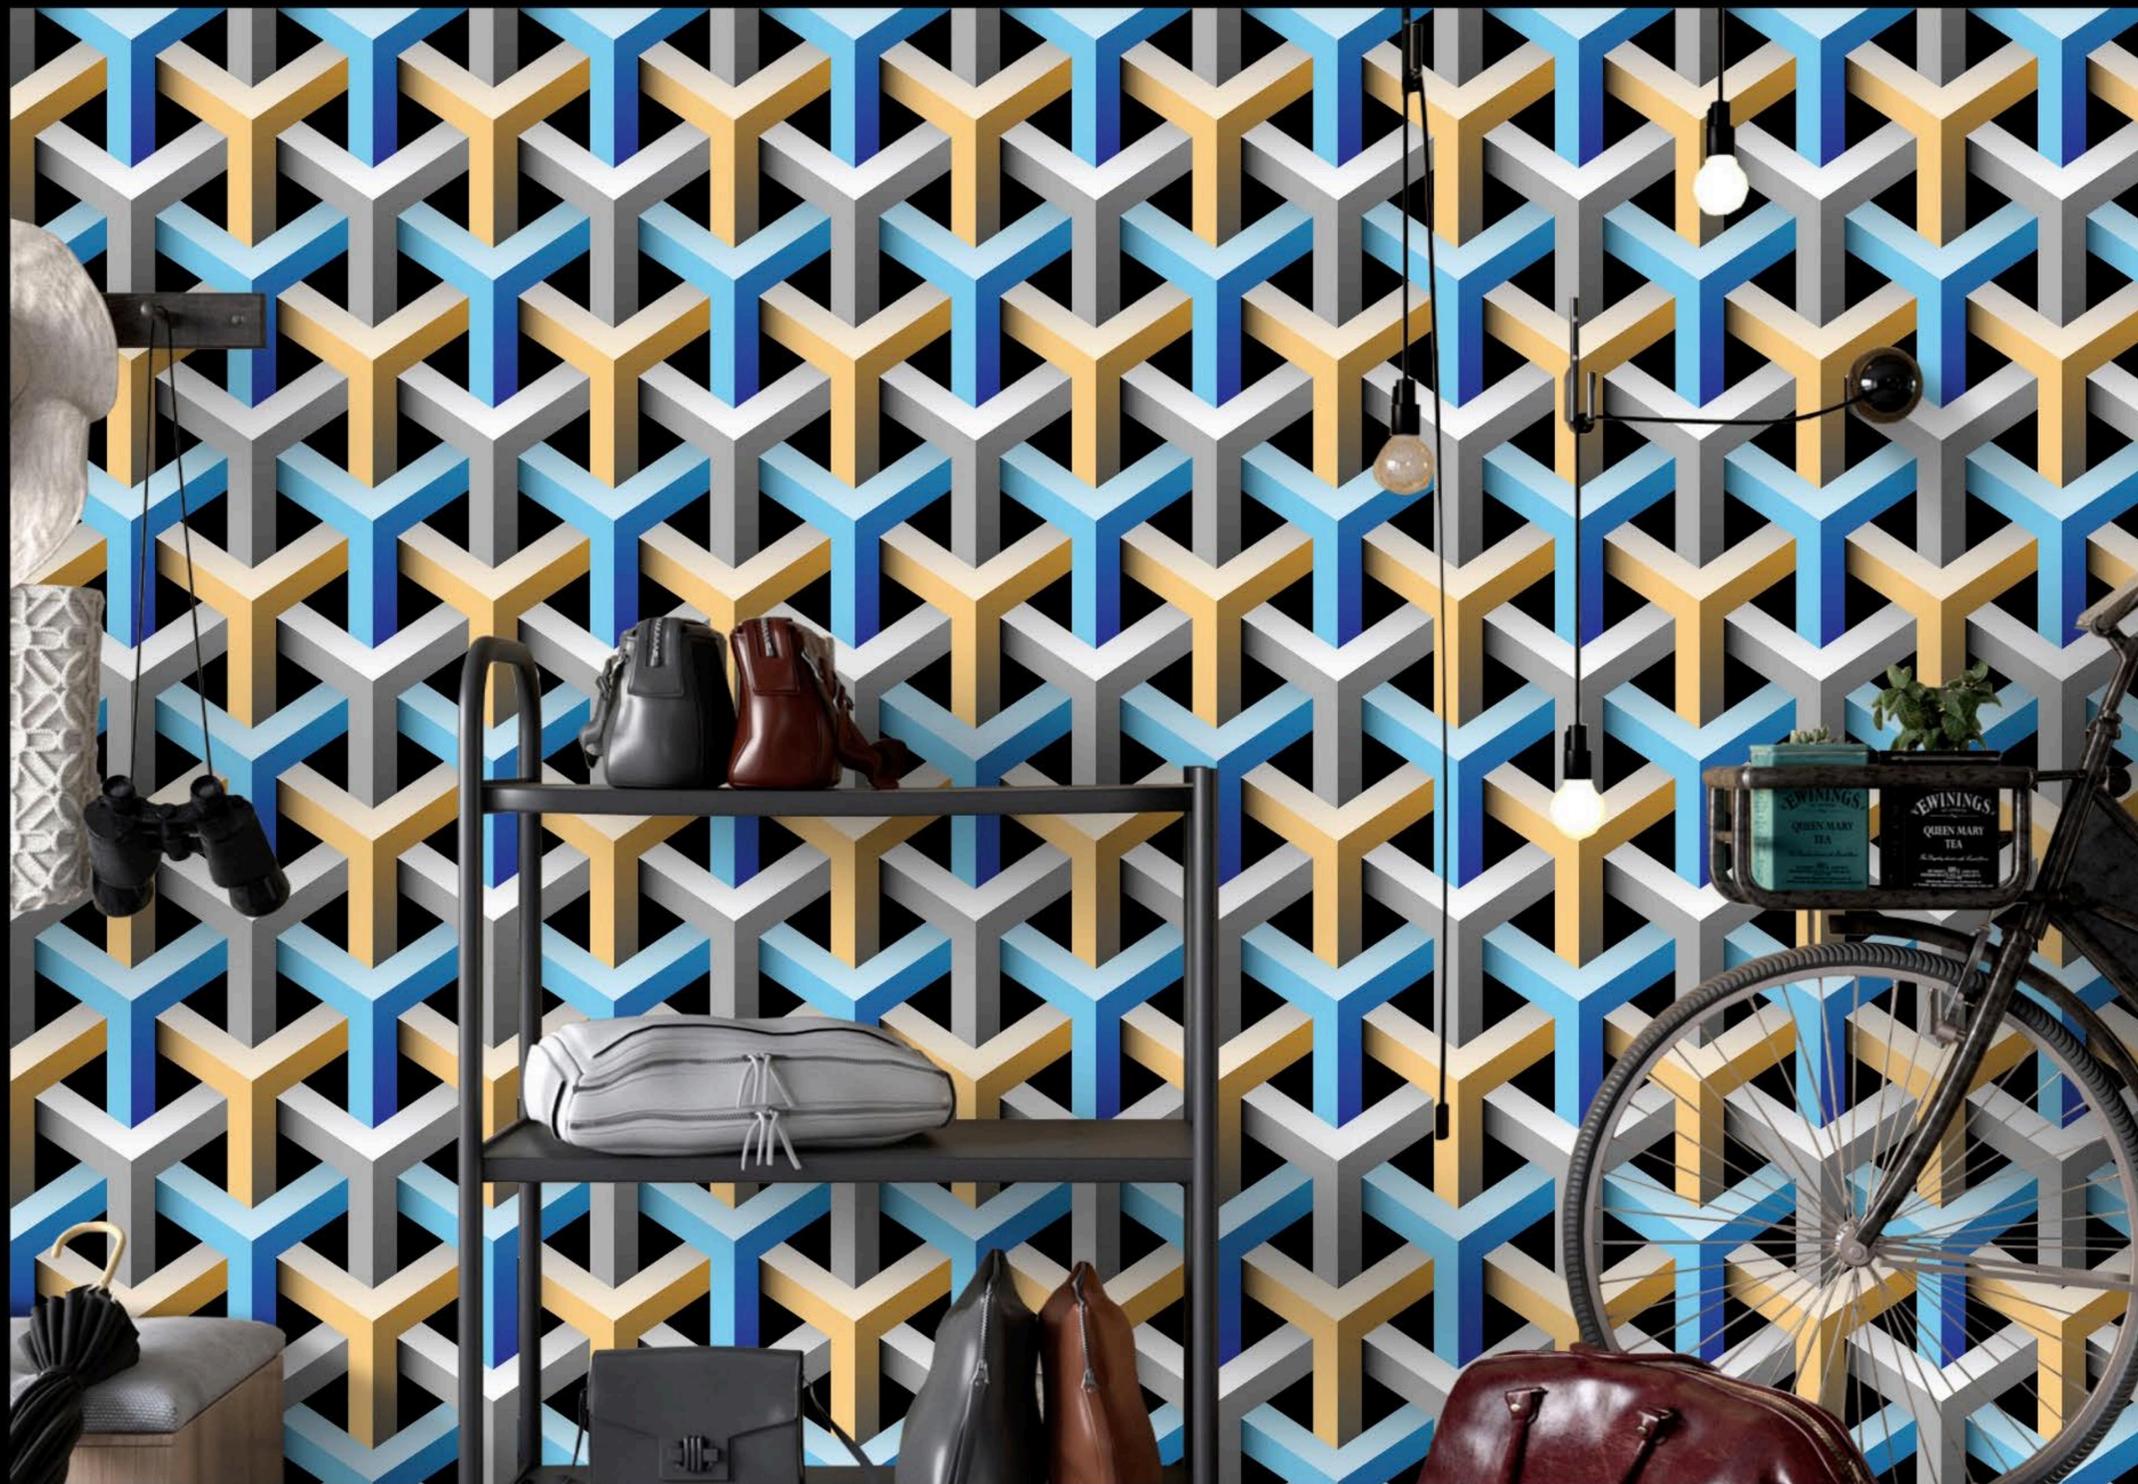


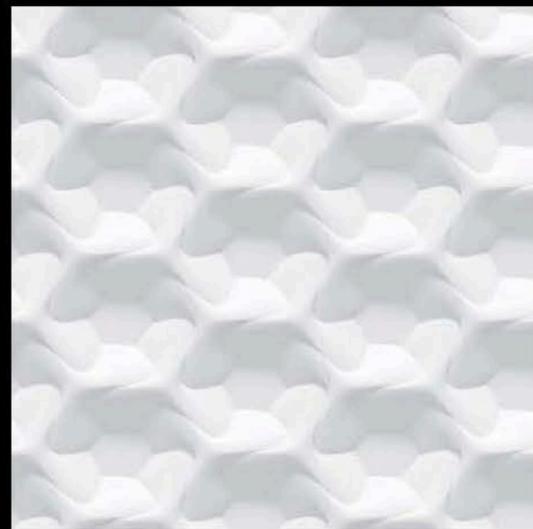

6045

600 X 600 mm  
Porcelain tiles

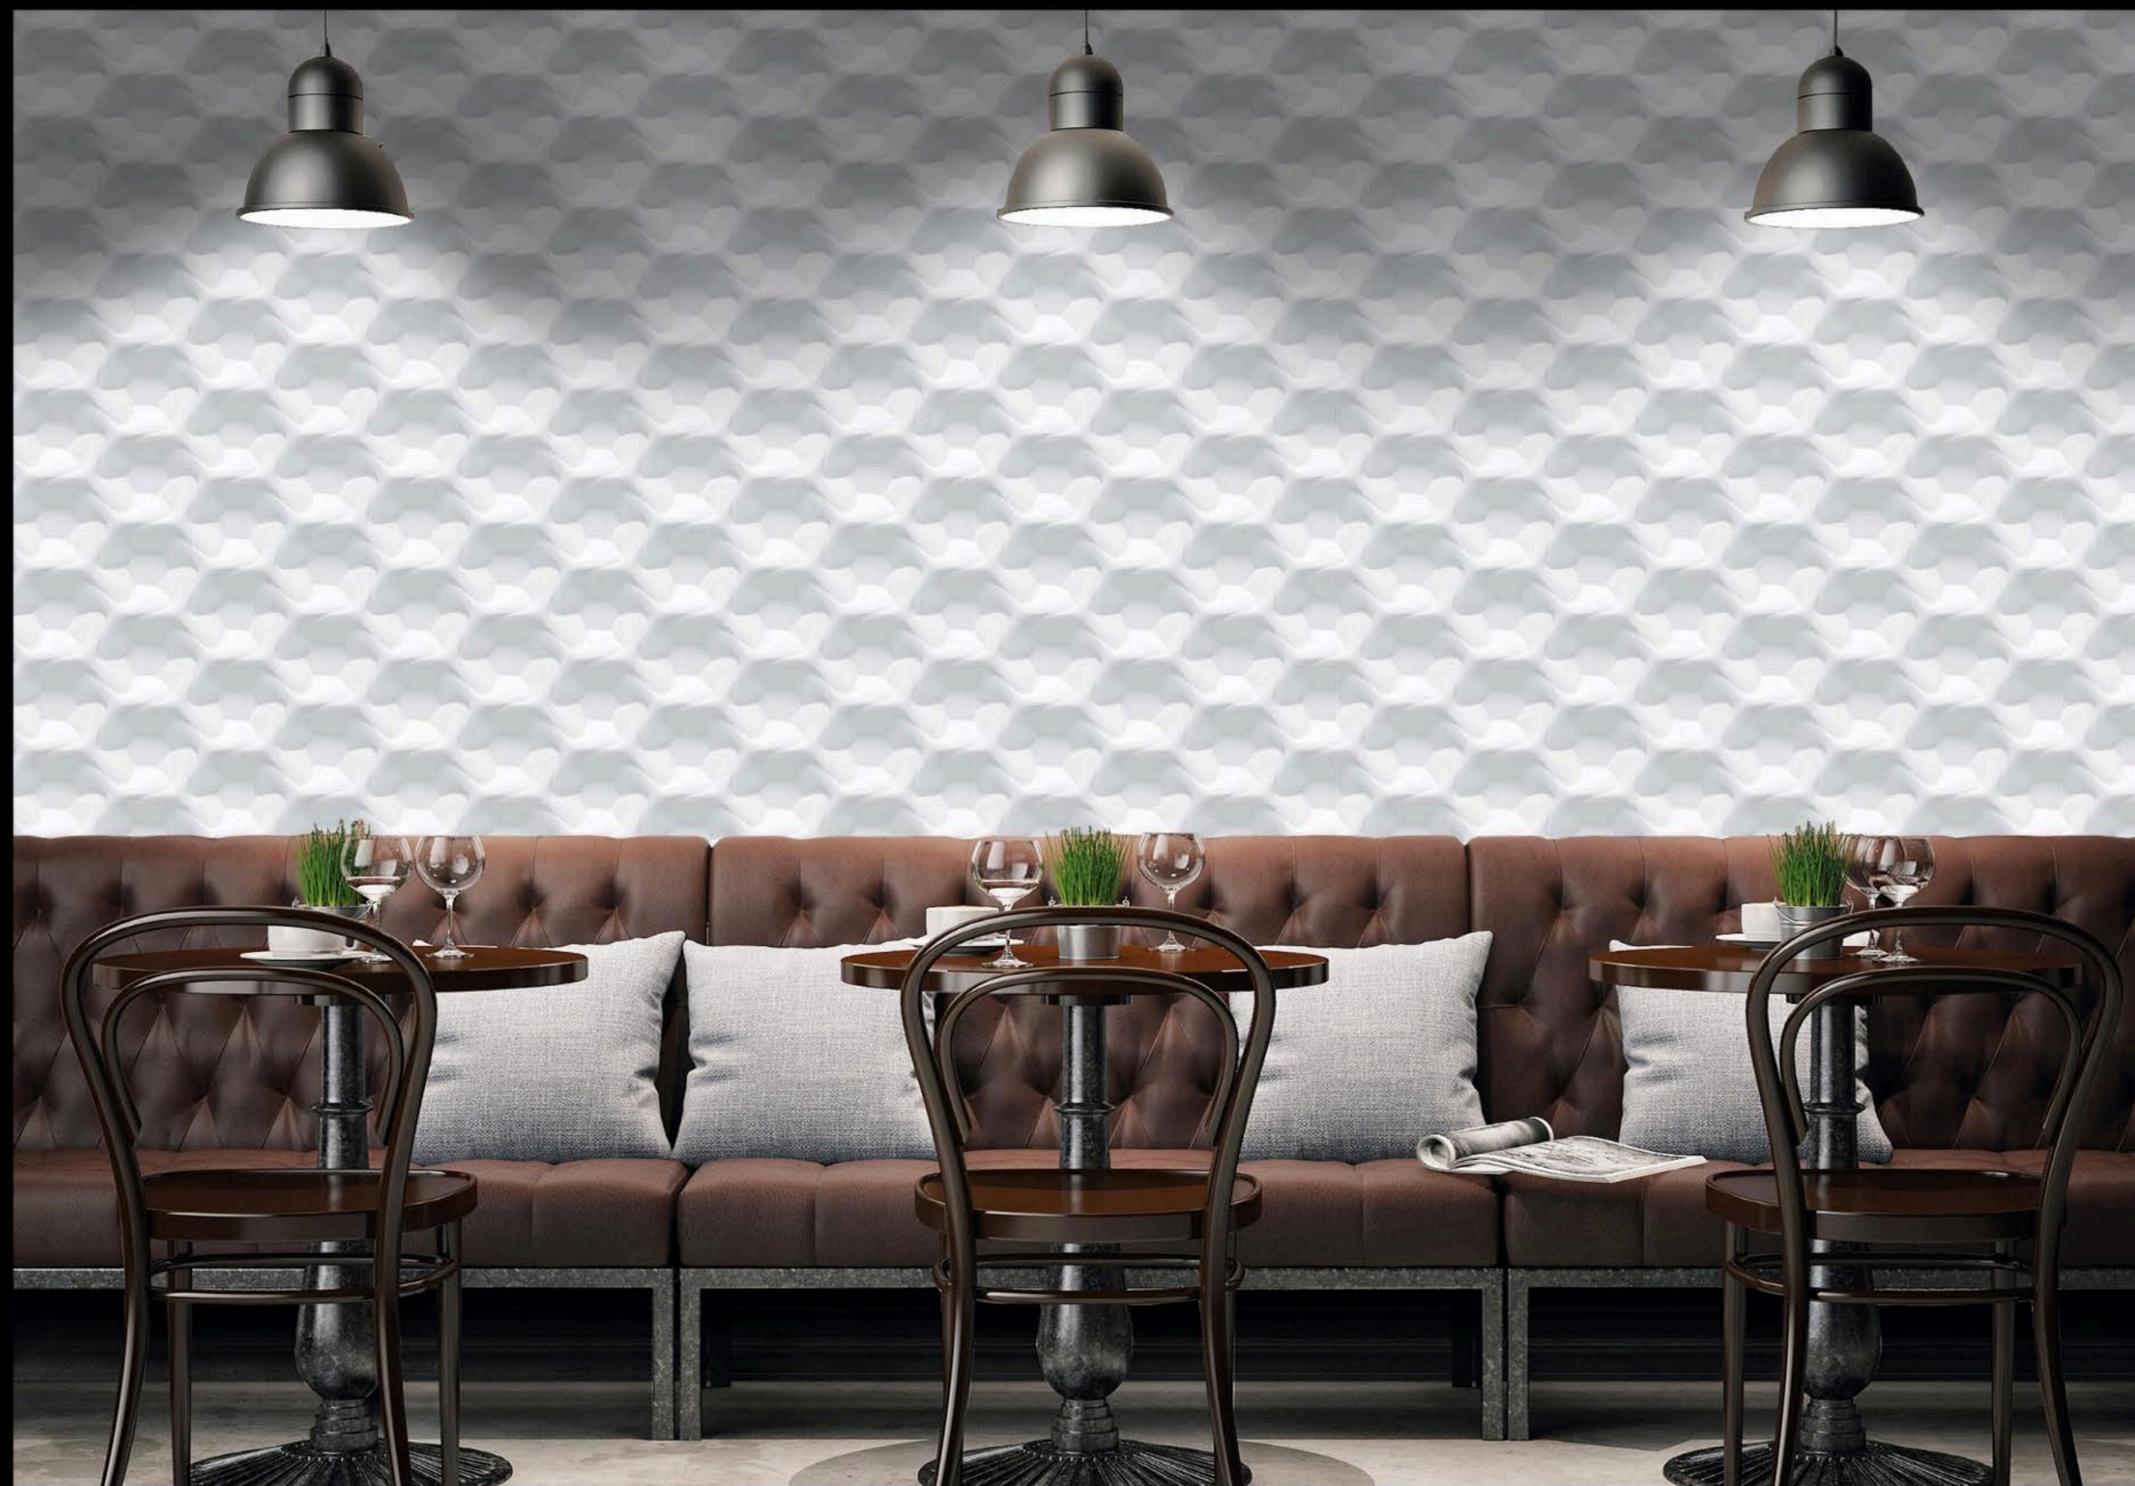


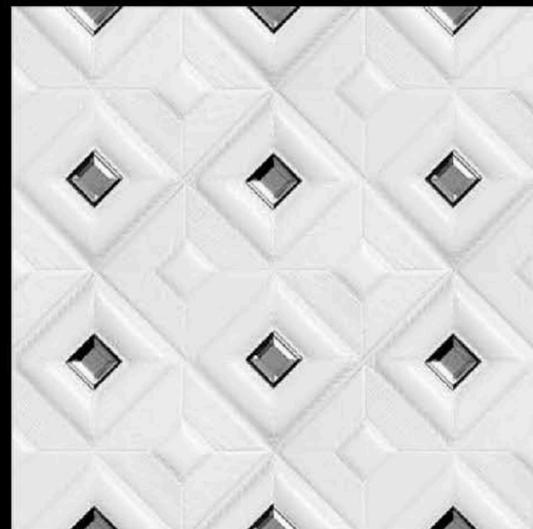

6047

600 X 600 mm  
Porcelain tiles



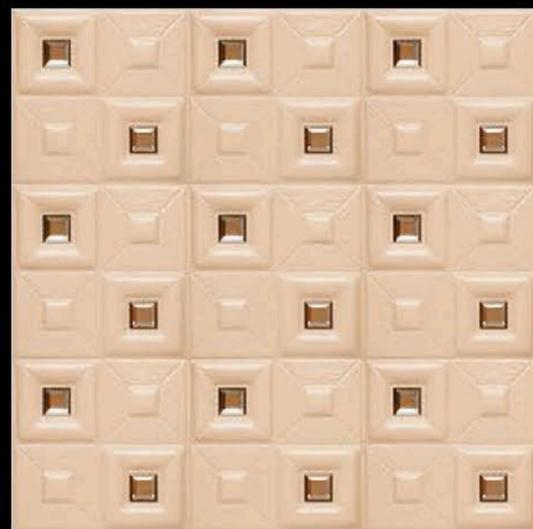

6048

600 X 600 mm  
Porcelain tiles



Particulars	Standard as per ISO 13006/EN 176	OUR VALUE	METHOD OF TESTING
Deviation in length	± 0.50%	± 0.3%	EN 98
Deviation in Thickness	± 5%	±3%	EN 98
Straightness Of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.3%	EN 98
Water Absorption	< 3	3 < 4	ISO 10945.3 EN 98
Mohs Hardness	> 5	> 5	EN 101
Flexural Strength	> 35 N/Sq.mm	> 39 N/Sq.mm	—
Abrasion Resistance	As specified by Manufacturer	PE   3	ISO 10545.6 EN 102
Frost Resistance	Frost Proof	Frost Proof	ISO 10534 - 11
Chemical Resistance	No Damage	No Damage	ISO 10534 - 18
Thermal Shock Resistance	No Damage	No Damage	ISO 10545- 9
Colour Resistance	No Damage	No Damage	—
Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
Moisture Expansion	Nil	Nil	ISO 10545 - 10
Crazing Resistance	Min 2 Cycle	Min 4 Cycle	—

**Note**  
Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase and laying as the company dose not accept responsibility once the tiles are laid.

**PACKING DETAIL**

Size	Thickness	No.OF Tiles	Area Approx.	Weight Approx.
600x600 mm	9 mm	4 Pcs.	1.44 Sq. Mtr.	28kg.

**UTILITY OF FLOOR TILES**

