

600 X 600 mm
Porcelain tiles

FRENI'S
Ceramic

DOUBLE CHARGE MATT SERIES



3001

600 X 600 mm
Porcelain tiles






3002

600 X 600 mm
Porcelain tiles



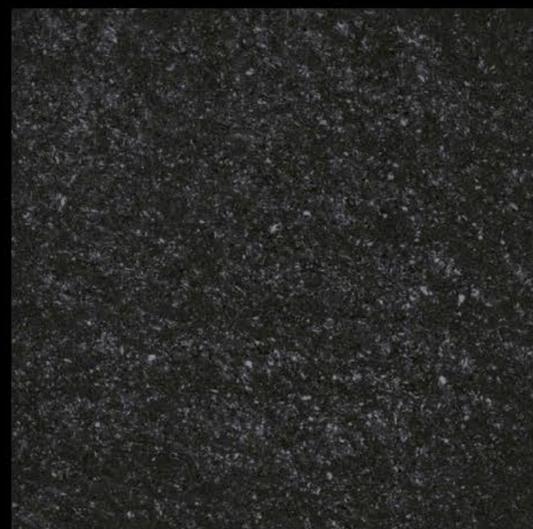

3003

600 X 600 mm
Porcelain tiles





3004

600 X 600 mm
Porcelain tiles





3005

600 X 600 mm
Porcelain tiles





3007

600 X 600 mm
Porcelain tiles





3008

600 X 600 mm
Porcelain tiles





3009


600 X 600 mm
Porcelain tiles



3011

600 X 600 mm
Porcelain tiles



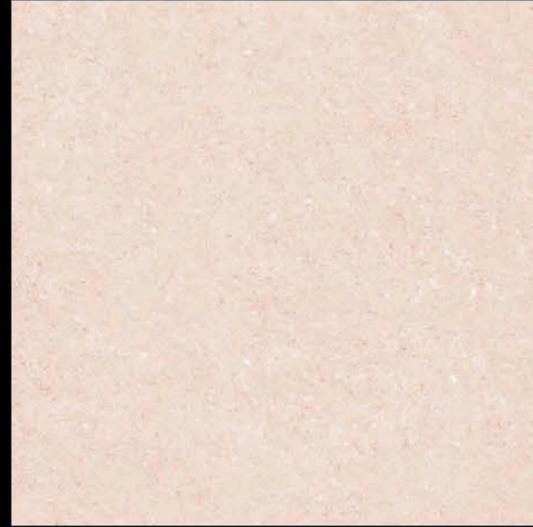

3012

600 X 600 mm
Porcelain tiles





3013

600 X 600 mm
Porcelain tiles





3014

600 X 600 mm
Porcelain tiles





3016



3015

600 X 600 mm
Porcelain tiles





3017

600 X 600 mm
Porcelain tiles





3018

600 X 600 mm
Porcelain tiles





3019

600 X 600 mm
Porcelain tiles





3020

600 X 600 mm
Porcelain tiles






3021

600 X 600 mm
Porcelain tiles




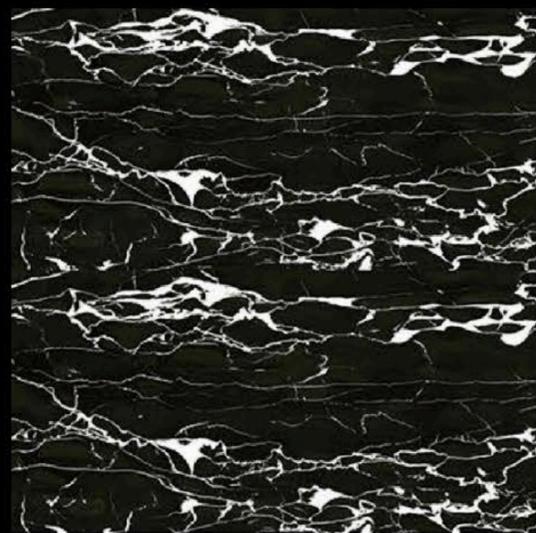

3022

600 X 600 mm
Porcelain tiles




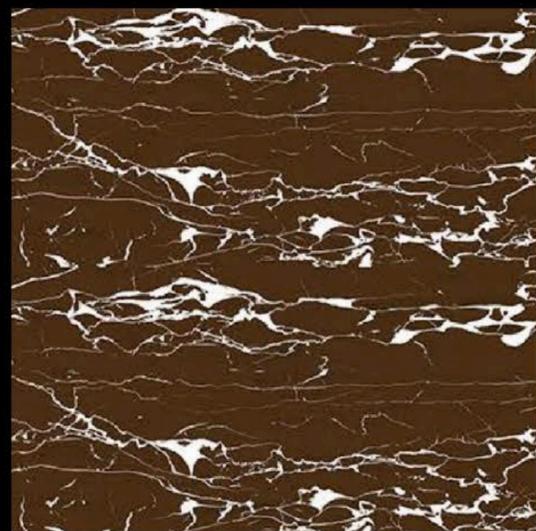

3023

600 X 600 mm
Porcelain tiles



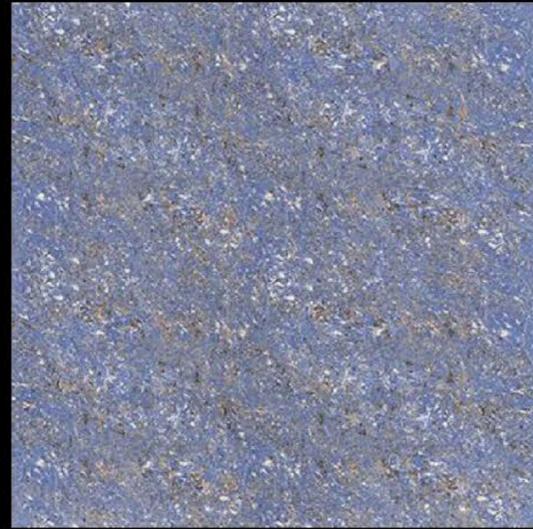

3025

600 X 600 mm
Porcelain tiles





3026

600 X 600 mm
Porcelain tiles





3027

600 X 600 mm
Porcelain tiles



| Particulars | Standard as per ISO 13006/EN 176 | OUR VALUE | METHOD OF TESTING |
|--------------------------|----------------------------------|--------------|--------------------|
| Deviation in length | ± 0.50% | ± 0.3% | EN 98 |
| Deviation in Thickness | ± 5% | ±3% | EN 98 |
| Straightness Of Sides | ± 0.5% | ± 0.3% | EN 98 |
| Rectangularity | ± 0.6% | ± 0.3% | EN 98 |
| Surface Flatness | ± 0.5% | ± 0.3% | EN 98 |
| Water Absorption | < 3 | 3 < 4 | ISO 10945.3 EN 98 |
| Mohs Hardness | > 5 | > 5 | EN 101 |
| Flexural Strength | > 35 N/Sq.mm | > 39 N/Sq.mm | — |
| Abrasion Resistance | As specified by Manufacturer | PE 3 | ISO 10545.6 EN 102 |
| Frost Resistance | Frost Proof | Frost Proof | ISO 10534 - 11 |
| Chemical Resistance | No Damage | No Damage | ISO 10534 - 18 |
| Thermal Shock Resistance | No Damage | No Damage | ISO 10545- 9 |
| Colour Resistance | No Damage | No Damage | — |
| Stain Resistance | Resistance | Stain Proof | ISO 10545 - 14 |
| Moisture Expansion | Nil | Nil | ISO 10545 - 10 |
| Crazing Resistance | Min 2 Cycle | Min 4 Cycle | — |

Note
Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase and laying as the company dose not accept responsibility once the tiles are laid.

PACKING DETAIL

| Size | Thickness | No.OF Tiles | Area Approx. | Weight Approx. |
|------------|-----------|-------------|---------------|----------------|
| 600x600 mm | 9 mm | 4 Pcs. | 1.44 Sq. Mtr. | 28kg. |

UTILITY OF FLOOR TILES

